


125W LED Retrofit Lamp

Order Code: LP15217

DLC Model# OR125NC-A[E39 EX39]-AK01

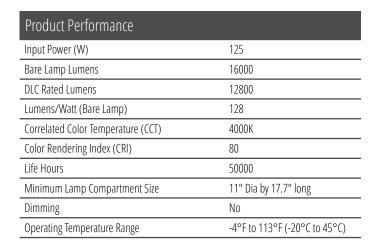

Physical Characteristics	
Base Type	Mogul (EX39)
Overall Length A	10.79" (274mm)
Diameter B	5.75" (146mm)
Weight	3.47 lbs (1577 g)

Electrical Characteristics	
Input Voltage Range	120V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

Regulatory Qualifications
cULus Listed
IP64 Rated
cULus Classified – Certified to UL 1598C
DLC Qualified - Model# OR125NC-A[E39 EX39]-AK01

Accessories

SP12714 - 120-277V Surge Protector



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- · Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- · Universal burn position
- · Easy installation
- Reduced maintenance costs
- *Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 11" diameter by 17.7" long.

Applications

- Highbay
- Area Lighting
- · Flood lighting
- · General illumination

Notes

- The use of an external surge protection device is recommended
- Operating temp. range between -4°F and 113°F (-20°C and 45°C)
- IP64 Rated
- Suitable for use in dry and damp environments
- Suitable for use in portable, surface mounted and ceiling luminaires
- Suitable for use in totally enclosed, recessed luminaires.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- · Lamps have clear polycarbonate cover lenses










Venture 125W LED Retrofit Lamp

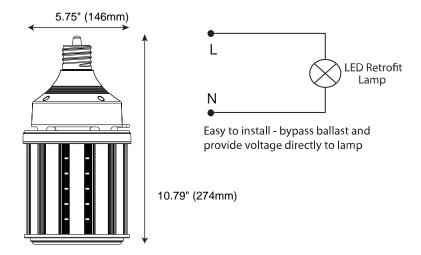

(800) 451-2606 Fax: (800) 451-2605 2451 Enterprise Parkway East Twinsburg, Ohio 44087 USA E-mail: venture@adlt.com VentureLighting.com

