

40W LED Retrofit Lamp

Order Code: LP27198

Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs

Applications

- Lowbay
- Canopy
- Garage
- General Illumination

Notes

The use of an external surge protection device is recommended. Operating temperature range between -4°F and 122°F (-20°C and 50°C). Suitable for use in portable luminaires, surface mounted and ceiling luminaires.

Suitable for use in open or enclosed luminaries with a minimum lamp compartment dimensions of 8 inch diameter x 11 inch long.

Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.

DLC Model# OR-040AA-[E39 EX39]-4K

Product Performance	
Input Power (W)	40
Bare Lamp Lumens	4800
DLC Rated Lumens	4240
Lumens/Watt (Bare Lamp)	120
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Life Hours	50000
Dimming	No
Operating Temperature Range	-4°F to 122°F (-20°C to 50°C)
Physical Characteristics	
Base Type	Mogul, (EX39)
Overall Length A	6.01" (153mm)
Diameter B	5.2" (131mm)
Weight	2.06 lbs (933g)
Electrical Characteristics	
Input Voltage Range	100V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%
	-

Regulatory Qualifications

cULus Listed

cULus Classified (UL 1598C)


DLC Qualified - Model #OR-040AA-[E39 EX39]-4K

Accessories

BSP3-277-LC Surge Protector



Venture 40W LED Retrofit Lamp

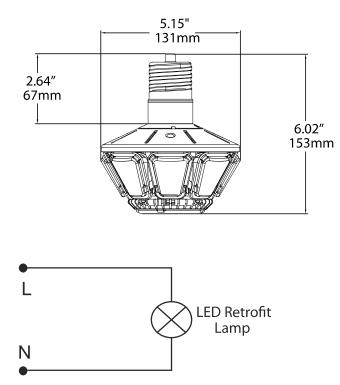

Easy to install - bypass ballast and provide voltage directly to lamp

-/+ 180 -150 150 120 -120 -90 90 \$4d -60 510 60 [>] UNIT: cd C0/180,157.0° 680 - C30/210,157.7° - C60/240,156.4° -30 30 850 0 C90/270,157.5° AVERAGE BEAM ANGLE (50%):157.1 DBG

(800) 451-2606 Fax: (800) 451-2605 2451 Enterprise Parkway East Twinsburg, Ohio 44087 USA E-mail: venture@adlt.com VentureLighting.com

