

www.votatec.ca

### Wide Linear Strip Fixture


WS90-4FT347-3CCT WS150-8FT347-3CCT

# Wide Linear Strip Fixture


CCT & Power Selectable



# General Wiring Diagram



# Wiring Diagram With Emergency



### Wiring Diagram With Emergency and Sensor

Black(line)	LED FIXTURE WITH EMERGENCY AND SENSOR
White(neutral)	
Green(grd)	

Emergency Wire

A.C.Line in 24/7Hour(Red)

#### Note:

In the case of 208 or 240 line voltage, the 2<sup>nd</sup> hot leg will be connected to the white lead coming from the fixture.

#### WARNING:

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Modifications to the product voids the warranty.

### IMPORTANT:

Before assembling your fixture, please make sure that you carefully read through this instruction sheet. Consider having your fixture installed by a qualified licensed electrician.

**Note:** The important safeguards and instructions that appear in this sheet are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.




www.votatec.ca

# Wide Linear Strip Fixture


WS90-4FT347-3CCT WS150-8FT347-3CCT

# **Chain Hang Installation**

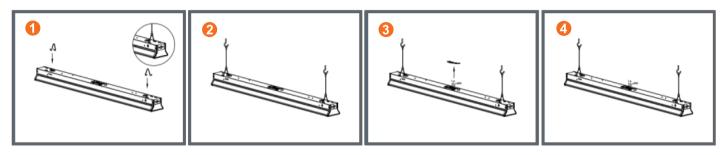

- 1. Install the hanging hooks(included)onto the top of the fixture,Make sure the wiring hangers are fully enga ged into the holes on the top channel.
- 2. Hook the chain onto the hanging hooks, then onto the ceiling anchors (not provided).
- 3. Open the wiring cover and make the wiring connections with terminal cap (refer to the General wiring diagram), the replace the wiring cover.
- 4. Installation is complete.

### Linkable Installation

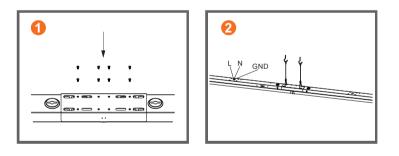

- 1. With screws, Use the connecting fittings to lock the back of the fixture.
- 2. For chain hanging, hook the chain onto the hanging hooks, then onto the ceiling anchors (not provided).